


SHOW CONTROL

V-Server4



V:Server is our interactive standalone show controller, designed to play back complex multimedia timecode shows composed using Depence Software. It supports industry-standard protocols and interfaces like DMX-RDM, ArtNET, sACN, ModBus, SMPTE, and more, ensuring seamless integration into any multimedia show installation. Available in versions from U8 to U48, it can control up to 48 DMX Universes. The 7" touch screen interface provides quick and easy access to all important settings and status messages. The Live-Panel offers a fully customizable human interface for your customer, accessible on a second touch screen or remotely on any tablet device. With its real-time calculation engine and powerful node-based logic feature, it offers maximum flexibility for any autonomous and interactive installation. V:Server also includes optically isolated digital/analog inputs & outputs to directly connect sensors and triggers, such as measuring water levels, wind levels, or gas pressure in your multimedia installation.

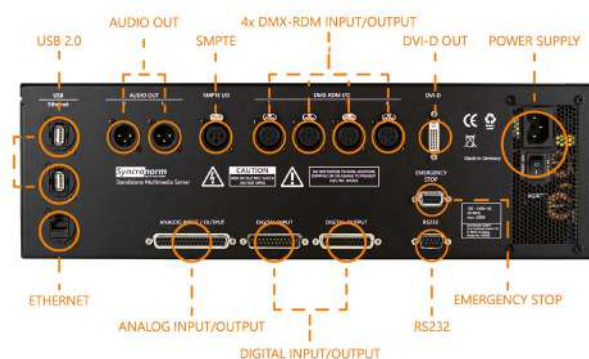

TECHNICAL DETAILS

Dimmension (LxMxH) :	19" 3HE 330mm depth (482 x 330 x 178)
Weight :	8,2 KG
DMX Output :	2048 Channels 4 Universes DMX-RDM
Protection Class :	IP20
Power Supply :	110V / 230V 50/60Hz AC max. 350W
Analog Ports (Input or Output) :	12x 0...10V DC 25mA Current Drive Capability with
Connectors :	4x DMX-RDM Neutrix XLR 5pin male optically isolated 2x Audio output symmetric stereo XLR 3pin male 1x SMPTE Timecode input or output XLR 3pin female 1x Ethernet RJ45 1x DVI-D Monitor output 3x USB 2.0 (1x front, 2x back) 1x RS232 9pol SUB-D male 1x Emergency Stop 9pol SUB-D female 1x Digital Output 25pol SUB-D female (provides 8 digital outputs) 1x Digital Input 25pol SUB-D male (provides 8 digital inputs) 1x Analog Port 37pol SUB-D female (provides 12 analog inputs or outputs)
DMX Output over ArtNet IV :	4096 Channels (U8) 8192 Channels (U16) 24576 Channels (U48)
Digital Outputs :	8x 12...24V DC max. 1A
Digital Input :	8x 12...24V DC
Synchronization :	SMPTE, NetTime, SNTC
Memory :	8 GB RAM, 256GB internal NVMe M.2 SSD
Display :	7" Touch internal
Scope of delivery :	Server, Powercable, Documentation
Product No :	5156